TOPAKUSTIK® type R

Type R has an irregular grooving pattern that has different repetition options. The plank options of Duo and Trio can be installed in random sequences to increase the random nature. Panel repetition occurs every 592 mm (23"). All options available with either 3 or 4 mm wide groove slots.

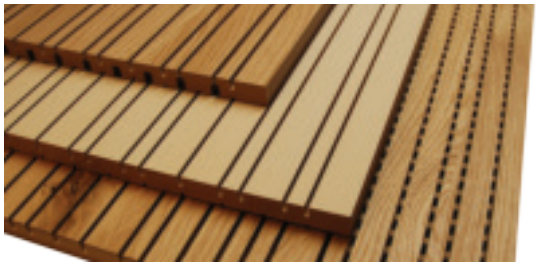

Planks

RL3 Solo | 3mm wide grooves
RL4 Solo | 4mm wide grooves

One single profile with repetition at 128mm

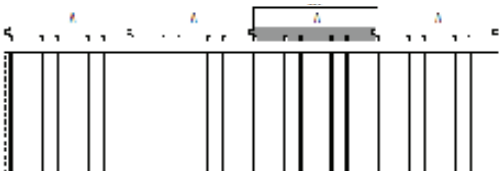

RL3 Duo | 3mm wide grooves
RL4 Duo | 4mm wide grooves

Two unique plank profiles with repetition at 128 mm

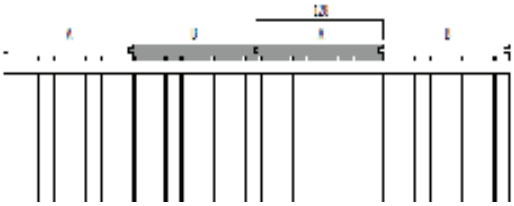

RL3 Trio | 3mm wide grooves
RL4 Trio | 4mm wide grooves

Three unique plank profiles with repetition at 128 mm

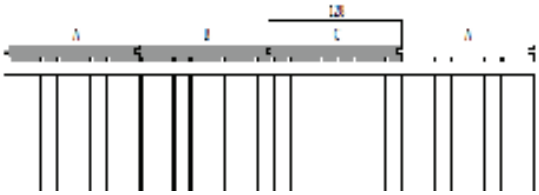

Finishing Options

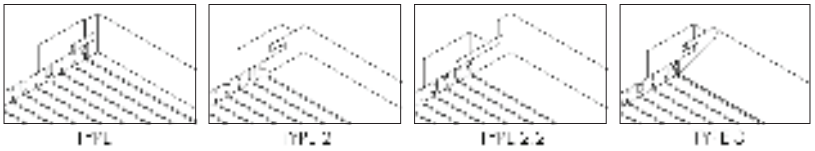

Panels

RP3
RP4

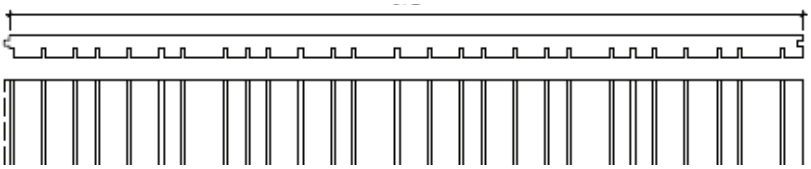

Finishing Options

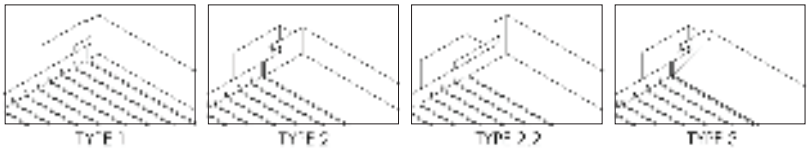



EDGE BANDED WITH GROOVES RUNNING OFF PANEL ENDS

EDGE BANDED WITH GROOVES HELD BACK FROM PANEL ENDS

MITERED RETURN FACTORY ATTACHED UP TO 6"

CUSTOM SHAPES

Panels and Planks are available in Class A or Class C fire rated materials and in 3 finish options: Paint, Wood Veneer and Melamine.

Sound Absorption Values

RL3 | 7.4% (3 for 3 mm groove)

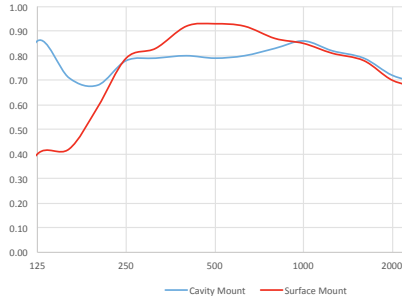

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" Insulation 6" Cavity Behind	0.70	0.75	0.80	0.84	0.73	0.66	0.81
1" Insulation Surface Mount	0.33	0.74	0.92	0.84	0.72	0.63	0.84

RL4 | 9.4% (4 for 4 mm groove)

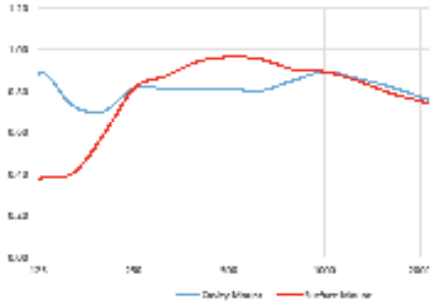

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" Insulation 6" Cavity Behind	0.71	0.77	0.81	0.87	0.77	0.68	0.82
1" Insulation	0.31	0.75	0.95	0.88	0.75	0.68	0.85

RP4 | 10.7% (4 for 4 mm groove)

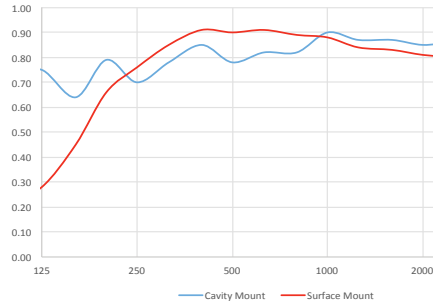

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" Insulation 6" Cavity Behind	0.71	0.76	0.82	0.86	0.86	0.82	0.82
1" Insulation Surface Mount	0.32	0.76	0.91	0.87	0.81	0.77	0.84

Visit our website for corner trims and finishings.

SGB ACOUSTICS LLC
1123 STATE ROUTE 3 N #279
GAMBRILLS, MD 21054

(410) 849-4333
INFO@TOPAKUSTIKUSA.COM
WWW.TOPAKUSTIKUSA.COM